EMBULK Datasheet

Key Features

- IP65 rated LED maintained emergency bulkhead
- 1 x 3.6V 1.5Ah NiCd battery - 3 hours duration
- Compliant with EN60598.2.22
- White polycarbonate base and clear fresnel lens

Technical Drawing

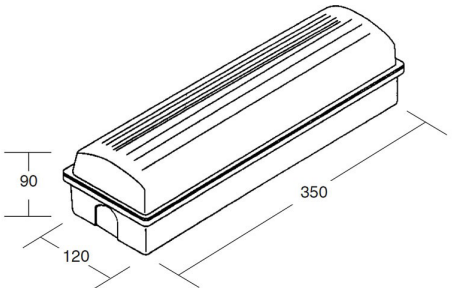

DC Declaration of Conformity available

Ordering Information

Luminaire Output	Power	Colour	Model Ref.
llm	W	K	
150	3	4 - 5000	**EMBULK**

Options

DALI / Self-test	**/EMD**
Adhesive legend kit (left-right-up)	**/ISO**

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification. E&OE. **MDS-235D 14/02/2019**