LXS002
Datasheet

EU

ISO

Features

- Maintained or non-maintained operation
- 15 x High intensity LEDs for bright, even illumination of legend
- Double sided acrylic legend panels conform to requirements of EU signs directive
- ISO signage also available
- Custom designed signage available
- Supplied with arrow down legend (EU)
- DALI / self-test version available
- Ceiling mounting bracket
- Compact lamp / gear housing compared with conventional light sources

Technical Drawing

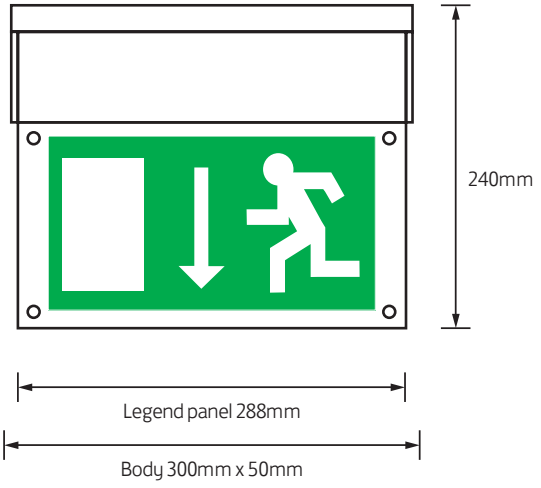

DC Declaration of Conformity available

Ordering Information

Model Ref.	Bezel Finish	Rated Duration	Recharge Time	Typical Lifetime
LXS002	Brushed Aluminium	3hr	24hr	50,000hr

Options

Please select from the options below.

DALI / self-test	**/EMD**
Reversable left / right legend panel (EU)	**LXSLR**
Double sided arrow up legend panel (EU)	**LXSUP**
Double side arrow down legend panel (ISO)	**LXSAD/ISO**
Reversible left / right legend panel (ISO)	**LXSLR/ISO**
Double sided arrow up legend panel (ISO)	**LXSUP/ISO**

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification. E&OE. **MDS-162D-REV2 19/10/2021**