


# Data Sheet



## KEY FEATURES

- IP65, IK08 anti-corrosive LED batten
- High efficacy, Ra80, 3 SDCM LEDs powered by Tridonic
- Available in 4 or 5 ft lengths
- Robust injection-moulded polycarbonate body
- Micro prismatic, high impact, self-extinguishing V0 diffuser
- End conduit entry points (with rear conduit knockouts)
- Adjustable ceiling fixing with 150 mm fixing channel
- Quick-release stainless steel grip clips (anti-tamper option)
- Nominal rated depreciation L70 @ >50,000 hours
- DALI, Bluetooth, emergency and sensor options
- 5 year warranty

## DIMENSIONS

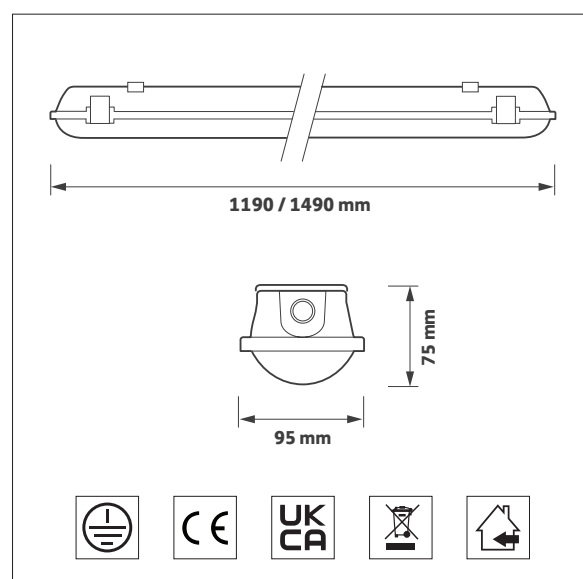


## ORDERING INFORMATION

| Length | Luminaire output (lm) | Colour | Luminaire power (tcW) | Luminaire efficacy (lm/tcW) | Model ref. |
|--------|-----------------------|--------|-----------------------|-----------------------------|------------|
| 4 ft   | 3675                  | 840    | 23.0                  | 159                         |            |
| 4 ft   | 4475                  | 840    | 28.5                  | 157                         |            |
| 4 ft   | 5325                  | 840    | 34.5                  | 154                         |            |
| 4 ft   | 6100                  | 840    | 40.5                  | 150                         |            |
| 5 ft   | 5300                  | 840    | 33.0                  | 161                         |            |
| 5 ft   | 6625                  | 840    | 41.5                  | 160                         |            |
| 5 ft   | 7950                  | 840    | 50.0                  | 159                         |            |
| 5 ft   | 9250                  | 840    | 59.0                  | 157                         |            |

## OPTIONS

| Options                           | Suffix |
|-----------------------------------|--------|
| SwitchDIM, DALI, DALI Data or DSI | /ECO   |
| Casambi wireless network          | /BTC   |
| Integral emergency                | /EMI   |
| Integral DALI emergency           | /EMDI  |
| Occupancy sensor - On / off       | /SO    |
| Occupancy sensor - Dim            | /SD    |
| QuickWire connector (3-core only) | /PAP   |
| Through wired                     | /TW    |
| Product variations available      | PV.    |

# Options and accessories



## /ECO

SwitchDIM, DALI,  
DALI Data or DSI



## /BTC

Casambi wireless  
network inc. dimming



## /EMI

Emergency



## /EMDI

DALI emergency




## /SO

PIR sensor - On / off



## /SD

PIR sensor - Dim



## /PAP

QuickWire connector  
(3-core only)



## /TW

Through wired

## ACCESSORIES AND PRODUCT VARIATIONS



## SUS129/2M

2 m suspension kit




## CMK129

Corner mounting kit



## AT129

16 piece anti-tamper kit




## SPR129

Sensor programming  
remote



## Contact Sales

Philips MasterConnect  
wireless control



## Contact Sales

HubSense wireless  
control



## Contact Sales

Any RAL colour

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. We reserve the right to amend or change details without prior notification. E&OE.