



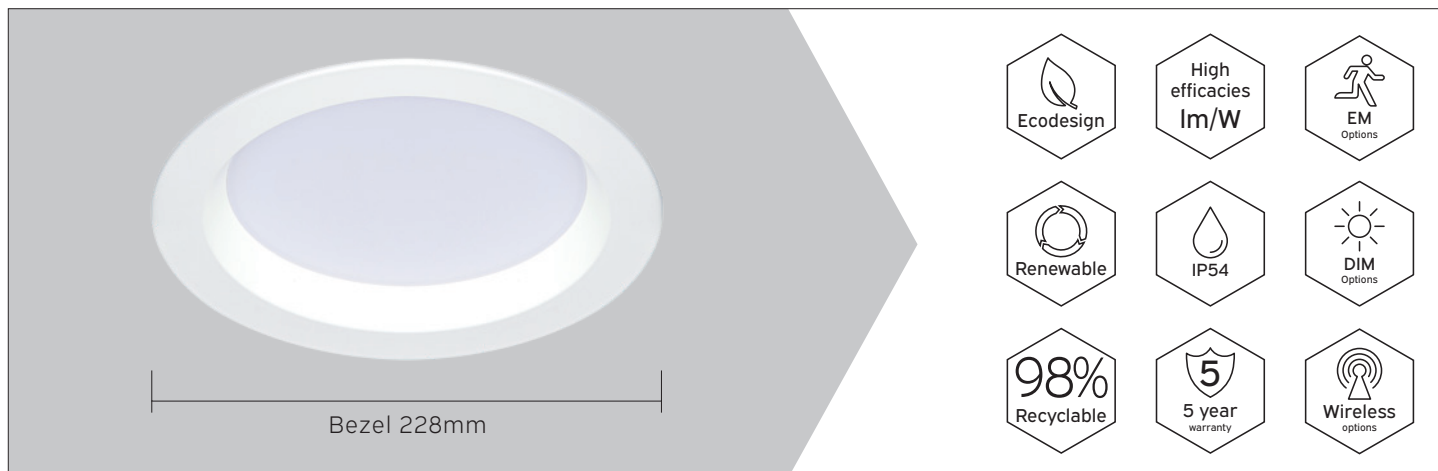

KEY FEATURES

- Professional IP54 commercial downlight
- Recessed opal PC diffuser
- SMD LED powered by Tridonic
- Bezel finished in RAL 9016 white
- Switchable 3 x CCT - 830 / 840 / 856
- Long life 50,000 h L70
- Emergency, DALI, dimming and wireless network control options
- 5 year warranty

DIMENSIONS

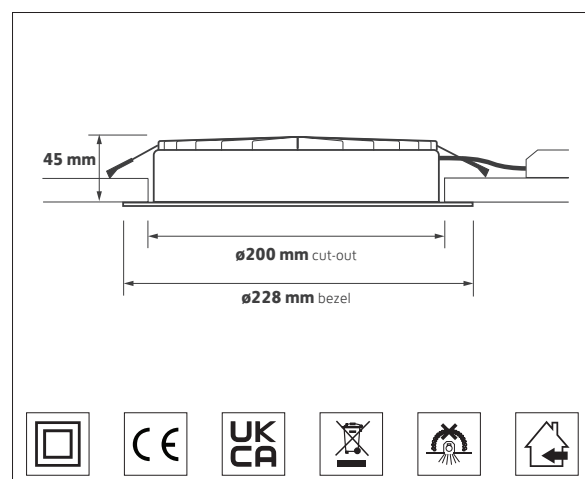


ORDERING INFORMATION

Luminaire output (lm)	Colour temp (switchable)	Luminaire power (tcW)	Light source efficacy (lm/W)	Luminaire efficacy (lm/tcW)	Model ref.
1625	830	13.5	172	120	
1625	840	13.0	172	125	
1475	856	13.5	154	109	
2250	830	19.0	160	118	
2275	840	18.5	163	123	
2025	856	19.5	144	107	
2625	830	23.0	152	114	
2700	840	22.0	157	123	
2350	856	23.0	137	102	
3325	830	31.5	142	106	
3500	840	30.0	149	117	
3025	856	31.5	130	96	

OPTIONS


Options	Suffix
Control gear	/MDIM, /ECO, /BTC
Emergency - Remote indicator	/EM, /EMD

Options & accessories



/MDIM

Phase-cut mains
dimming



/ECO

SwitchDIM / DALI / DSI



/BTC

Casambi wireless
network inc. dimming



/EM

Emergency
Remote indicator



/EMD

DALI / Self test EM
Remote indicator

PRODUCT VARIATIONS




Contact Sales

Choice of connectors

RELATED PRODUCTS



110 mm downlight

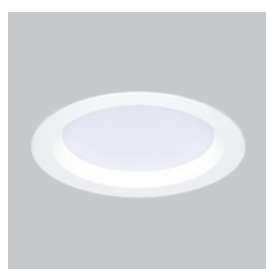

190 mm downlight